



TEMP-COAT Brand Products
17351 Hard Hat Row Unit B18
Covington, La 70435
985-875-2471
info@tempccoat.com



TEMP-COAT Brand Products

By: Jason Meyer

- **Located in Covington, Louisiana**
- **First registered name in insulation coatings**
- **25 Years of Successful Distributions and Installations**
- **Global Distribution**
- **3 ISO certified manufacturing locations in the US**
- **Pride ourselves on customer and technical support**
- **Over 25 products in our line**
 - **SR-1000/500**
 - **TEMP-COAT 101**

TEMP-COAT 101 Overview

- **A Ceramic Insulation that is a Thin Thermal and Condensation Barrier used as :**
 - Heat and Cold Temp Control
 - Personnel Protection
 - Anti-Sweat Control
 - Acoustics Control
- **And Can be applied to:**
 - Steam Pipes, Process Systems, Storage Tanks, Heat Exchangers
 - Roof Top, ISO containers
 - HVAC ducts, and much more

**Offshore Loading Skid
Photo Courtesy of
Chevron**

- **Thermal Effects**

- keqv value of 0.23 (BTU·in)/(hr·ft²·°F) according to independent tests
- k value range of 0.49 to 0.63 (BTU·in)/(hr·ft²·°F) per ASTM C-177

- **Fire Safety**

- LOW FLAME SPREAD of 5 (ASTM E-84) (0 is concrete and 100 is red oak flooring)
- Lloyd's Register Type Approved



Test Data

TEST	Results
Adhesion (ASTM D3359)	5A & 5B
Tensile (ASTM D638)	
• Strength, psi	66.7
• Elongation, %	65
Mandrel Bend (ASTM D522)	3/8" Pass
Salt Fog (ASTM B117, 2000hrs, 5%NSS)	
• Scribe	10
• Field	10
Accelerated Aging, \E (ASTM G53, UV-A)	
• 2,000 Hours	1.08 (Excellent)
Total Solids, wt% (ASTM D2369)	82.72%
VOC EPA Method 24 (ASTM D2369)	0.071 lbs/gal
ASTM E84 (Flame Spread)	Class A
ASTM E162	Class A
IMO FTP Code Part 5&6 (Flame Spread)	Pass(Interior Use on Passenger Vessels)
IMO FTP Code Part 2 (Smoke and Toxicity)	Pass (Interior Use on Passenger Vessels)

TEMP-COAT Brand Products has on file a wide range of testing available for review

Advantages

Personnel Protection

- Piping, flanges, valves, eyewash piping, tanks etc..



Personnel Protection

- The base guidelines widely used by industry is generally is for the surface temperature to be less than 140°F(60°C)
- ASTM C1055 (Standard Guide for Heated System Surface Conditions that Produce Contact Burn Injuries) defines the maximum acceptable temperature for a particular surface derived from estimate of the possible or probable contact time.
- Per ASTM 1055, probable contact time established for industry is 5 seconds.
- Per ASTM 1057, a thermesthesiometer may be used to replicate the thermal physical response for the human finger.

Advantages

Thermesthesiometer Reading After 5 Sec. (Simulated Skin Temperature@ 85°F Ambient)

Coating Thickness	200F	250	300	350
40mils				
1	114	123	135	
60mils				
1	112	121	131	
80mils				
1	112	119	129	130
100mils				
1	110	117	127	130
120mils				
1	108	115	122	129
140mils				
1	103	112	120	127
160mils				
1		112	119	127

Thermestisiometer Probe:

Therm-X

Model:

XTMS3125

Serial Number:


27758-040413-2

Calibrated by Manufacturer:

YES

Energy Retention

- Energy Savings
- Improve Process Heating and Cooling
- Reduce Thermal Shock from Environment
- Reduce Thermal Expansion

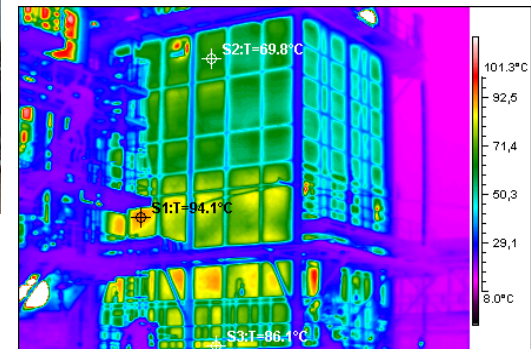

Ease of Inspection

- Fast Visual Assessment
- Ease of Repair



Advantages



Control of CUI

- Seamless Installation
- Adheres to Substrate




Advantages




- Reduces loss due to heating and cooling (sludge build up)
- Eliminates over 85% of solar heat transfer - highly reflective
- Adheres to hot and cold surfaces (-80° F(-66.2C) to +350° F(176.7C) and can insulate surfaces to 500° F
- Can be applied to surfaces up to 350F without disrupting operations
- Does not require jacketing allowing for visual inspection
- No seams to leak and cause corrosion issues
- Not prone to wind, hail or snow load damage
- Adheres directly to surface (eliminating moisture between insulation and surface causing scale and corrosion (CUI))
- Little to no maintenance and easy to use and repair
- Reduces or stops expansion and contraction, which causes roof damage

Advantages

Petroleum and Chemical

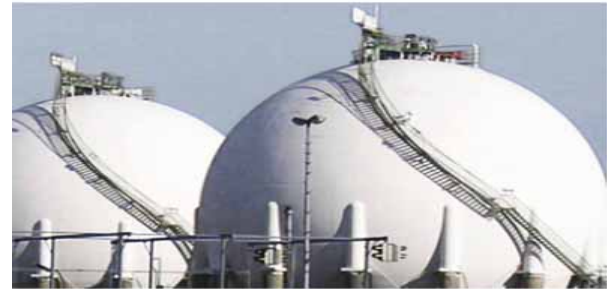

- Creates a better work environment, increasing productivity
- Provides a constant, uninterrupted thermal barrier regardless of the length or size of the job
- Extremely cost effective
- Can be tinted most light to medium colors by manufacturer or in country
- Environmentally Friendly: Low VOC's and No Heavy Metals

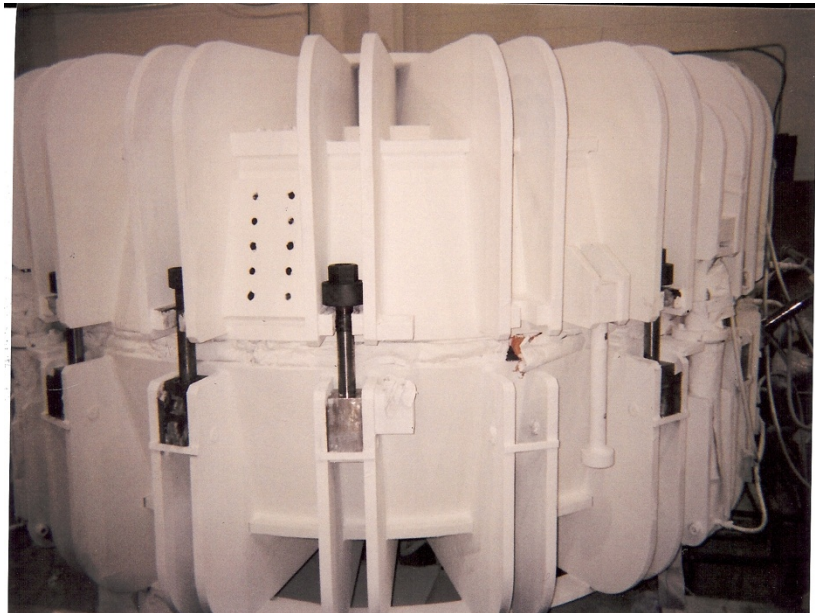

Application Facts

Desired Mil Thickness	Sq Feet per Gallon	Sq Meters per Gallon
240	3.75	.35
200	4.25	.40
180	5.0	.46
160	5.5	.51
140	6.5	.60
120	7.5	.70
100	8.5	.79
80	12.0	1.11
60	15.0	1.39
40	20.0	1.86
30	30.0	2.79
20	40.0	3.72
15	60.0	5.57

****Above Chart Reflects Practical Coverage With Loss**

- 15 mil to 20 mil per coat
- Performed by local certified applicators
- Surface application temperatures 45° F and rising (7° C) to 350° F (177° C)
- Uninhibited airless spray application between 15 and 30 mils on flat surfaces, with weather and conditions acceptable, a team of two persons can apply 550 SF per hour using conventional airless spray equipment
- Flash time under normal dry conditions is two (2) hours or less - much faster on warm to hot surfaces

°F of Substrate	°C of Substrate	Rec.Thickness in Mils (1/1000s of an inch)	Rec.Thickness in Millimeters
400**	204	210	5
350*	177	160	4
300	149	130	3
250	121	110	2.5
200	93	80	2
32	0	20	0.5
0	-18	40	1
-30	-34	50	1.2
-45	-40	60	1.5

*May disbond on at temps over 350F, TEMP-COAT HT may be used as base


**Temperatures great that 350F require




- **Product is 83% Solids By Volume**
- **Surface Preparation: SP2 Hand Tool Cleaning as defined by Steel Structures Paint Council**
- **Appropriate primer recommended for ferrous metals**
- **Product is mixed utilized a square sheet rock mud paddle**
- **Generally installed with airless spray equipment rated at 2 to 3 gallons per minute at 3000 psi**
- **Small applications and repairs may be achieved by use of the Quick Gun or brush and roller as needed**
- **TEMP-COAT BRAND PRODUCTS is a full service oriented company. We provide technical assistance from the beginning to end of your project to ensure its success.**



Application Facts

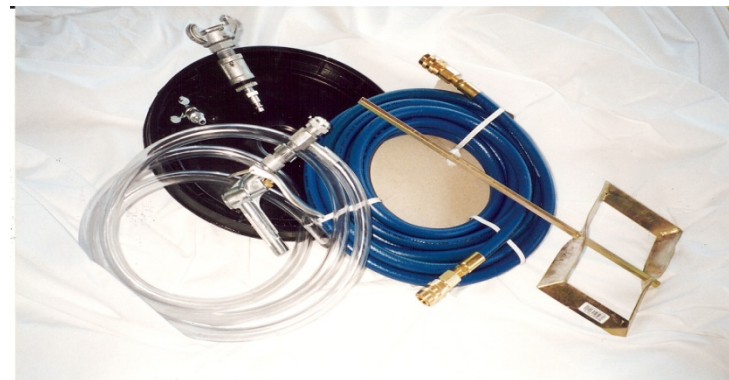

 <p>TEMP-COAT[®] THE POWER TO INSULATE AND PROTECT</p>	TEMP-COAT Brand Products L.L.C. 17351 Hard Hat Row Unit B18 Covington, LA 70435 1-800-950-9958 - 985-875-2471 Fax: 985-875-2470 info@tempcoat.com www.tempcoat.com
TEMP-COAT Project Data Sheet	
Contact Information Name: _____ Address: _____ City: _____ State: _____ Zip: _____ Phone: _____ e-mail: _____ Fax: _____	
Project Information System or Object: _____ Dimensions: _____ Substrate material: _____ Current Condition of substrate: _____ Current insulation: _____ Primed or Un-primed: _____ Design Temperature of System: _____ Operating Temperature of System: _____ Skin Temperature of Substrate (if known): _____ If substrate to be insulated is cold, is condensation and issue: _____ Ambient conditions in the region vessel will be operated: Summer Temperature: _____ Winter Temperature: _____ Summer % Humidity: _____ Winter % Humidity: _____ Please indicate if any other special considerations may apply: _____ _____ _____	
For use by TEMP-COAT Brand Products Representative Total Square Footage: _____ Mil thickness Recommendation: _____ Total Gallons of Product Needed: _____	



Case History

Client: Evergreen
Location: Arkansas
Black Liquor Storage Tanks
Surface Temperature: +350°F
Operation: Constant
Year Coated: Approx. 2004
Status: Satisfactory
Contact: Available upon request




Client: Chevron
Location: Pascagoula, MS
Oil Product Storage Vessel
Surface Temperature: +350°F-400°F
Operation: Constant
Year Coated: 2012
Status: Satisfactory
Contact: Available upon request



Case History

Client: Titan Tire
Location: Ohio
Surface Temperature: +350°F
Operation: Cyclic
Year Coated: 2008
Status: Satisfactory
Contact: N/A

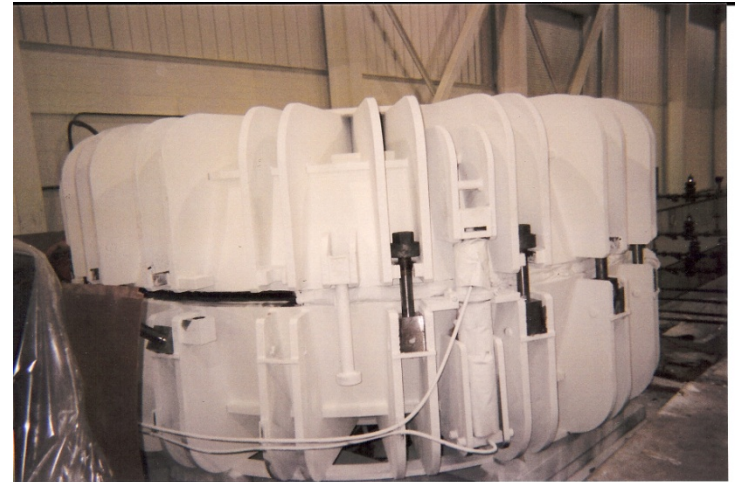


Client: Conagra
Location: California
Surface Temperature: +350°F
Operation: Cyclic
Year Coated: 2009
Status: Satisfactory
Contact: N/A



Case History

Client: Titan Tire
Location: Ohio
Surface Temperature: +350°F
Operation: Cyclic
Year Coated: 2007
Status: Satisfactory
Contact: N/A

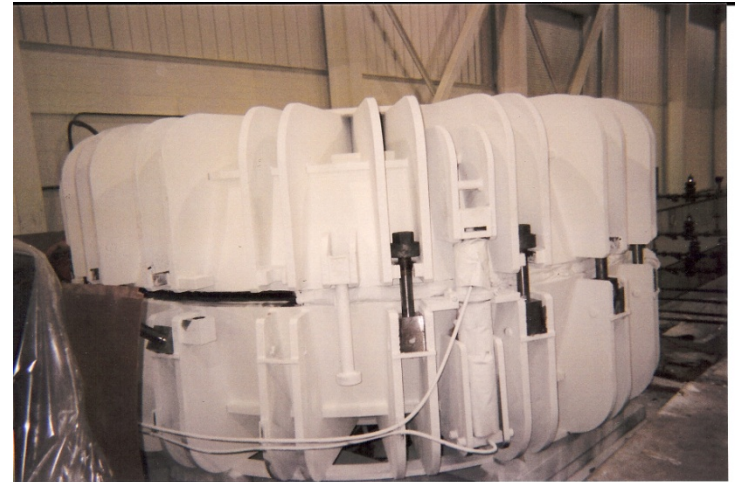

Client: Conagra
Location: California
Surface Temperature: +350°F
Operation: Cyclic
Year Coated: 2009
Status: Satisfactory
Contact: N/A



Case History

Client: GAZPROM
Location: Russia (Omsk & Moscow)
Heat Exchangers (Over 57)
Surface Temperature: +300°F
Operation: Constant
Year Coated: Work started 2011
Status: Satisfactory
Contact: By Appointment



Client: GAZPROM
Location: Russia (Omsk & Moscow)
Furnaces (Over 42 Furnaces)
Surface Temperature: +300°F
Operation: Constant
Year Coated: Work Started 2011
Status: Satisfactory
Contact: By Appointment



Case History

Client: Shell
Location: Norco
Pipe Systems
Surface Temperature: +/-200°F
Operation: Constant
Year Coated: 2003
Contact: By Appointment



Client: Chevron Offshore
Location: Angola
Loading Skids
Surface Temperature: +/-200°F
Operation: Constant
Year Coated: Work Started 2011
Status: Satisfactory
Contact: N/A






Chevron Offshore (Angola)



Chevron

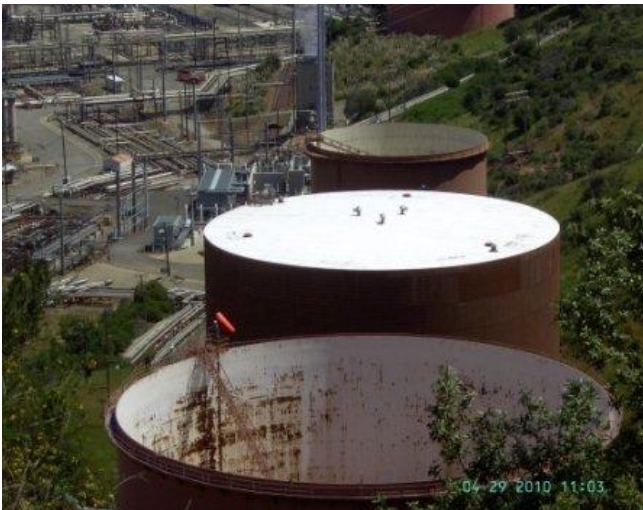

Chevron (California)

Other Projects



Other Projects



Other Projects



Other Projects



Other Projects



SR 1000 Overview

- **A Viscoelastic Coating used to eliminate vibration :**
 - Personnel Protection
 - Acoustics Control
- **Can be applied to:**
 - Operator Shelters,
 - Generator Housings
 - Rotating equipment Housings
 - HVAC ducts, and much more



- **Fire Safety**
 - Lloyd's Register Type Approved

